




## Product Data Sheet

## F Type Needle Valve

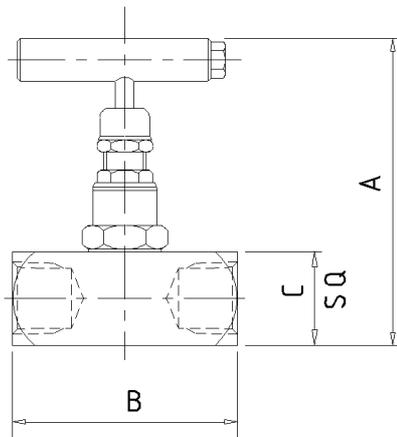

The 'F' Type Single Isolating Needle Valve is designed for safe and reliable isolation giving bubble tight shut off, non-rotating & anti-galling tip and dynamic self-adjusting spindle seal to give long service life in a variety of applications.

Part No.	Connections Size	A	B	C	Weight (Kgs)
F25	1/4"	3.6	2.1	1.1	0.5
F38	3/8"	3.6	2.4	1.1	0.5
F50	1/2"	3.6	2.6	1.1	0.5
F75	3/4"	3.6	2.9	1.5	0.8
F10	1"	3.6	3.2	2.0	1.4

### Key Features of the Oliver Needle Valve range

- Non rotating tip - self centering & anti-galling
- Piston ring - gives dynamic adjustment of gland seal in response to pressure change
- Anti-blow out spindle - a major safety feature
- Secure seal - precision machined to give leak free operation for the life of the valve. Available in either PTFE or Grafoil

### Standard Specification

Pressure: 6000psi	Packing: PTFE	Handle: T-Bar	Bore: 0.21" (5.4mm)
Temp: 240 deg C	Thread form: NPT	Seat: Metal to metal	CV: 0.46

### Ordering Code

(Typical example) → **F** **50** **S** / **BT** / **AT**

Female x Female

#### Size

25 - 1/4"      75 - 3/4"  
 38 - 3/8"      10 - 1"  
 50 - 1/2"

#### Material

S - 316S31 Stainless Steel  
 C - 230M07 Carbon Steel  
 M - Monel (400)  
 HC - Hastalloy (C276)  
 (Others available)

#### Optional Connections (NPT Standard)

BT - BSP Taper  
 BP - BSP Parallel (top sealing)  
 SW - Socket Weld

#### Options

AG - Grafoil  
 AT - Anti-Tamper  
 HL - Handle Locking  
 HL PI - Handle Locking + Position Indicator  
 HP - 10000 psi  
 HW - Hand Wheel  
 LT100 - Cryogenic Head Unit (-100°C)

LT200 - Cryogenic Head Unit (-200°C)  
 MT - Metering Tip  
 MTG - Mounting Holes x 2  
 NA - NACE MR-01-75 (latest revision)  
 OXY - Oxygen Cleaned  
 PK - PEEK Soft Tip (not available oxygen cleaned)  
 PM - Panel Mount